
Prym Intimates Group

PH119-M1

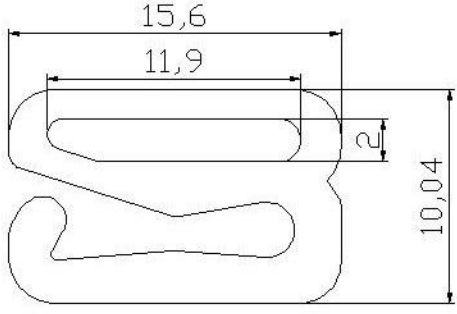

Scale - 1:5

Overall Width	Inside Width	Overall Height	Inside Height	Thickness
15.6+/-0.2mm	11.9+/-0.2mm	10.04+/-0.2mm	2.00+/-0.2mm	1.1mm+/-0.2

Nylon coated Rings and Slides: Technical Section

Material:	Hard Bright Steel	Coating:	Nylon
Temper/Hardness:	VPN 180/220	Finished Dimension Tolerance	+/- 0.20 mm

Excellent Impact Strength: Impact Test: 22 mm object of 2 kg at 50cm distance. Quality remains unchanged

Excellent Abrasion Strength:
Excellent Frictional Resistance
Excellent Surface Coat Resistance to Boiling Water: 2,000 hours of boiling. Quality remains unchanged.

Excellent Salt Water Test Results
Excellent Chemical Resistance 2,000 hours of exposure to Sodium Chloride. Quality remains unchanged

Prym Intimates Europe Ltd
Phone : 0044 1594 560423
Fax : 0044 1594 560434
email : sales@prym-intimates.com

Prym Intimates Lanka (Pvt) Ltd
Phone : 0094 11 4761400
Fax : 0094 11 4761404
email : sales@prym-intimates.com.lk

Prym Intimates Zhongshan Limited
Phone : 0086 760 6516608
Fax : 0086 760 6516708
email : CustomerService@prym-intimates.com.cn

Prym Intimates USA
Phone : 001 864 587 5230
Fax : 001 864 587 5222
email : claudia.poppe@prym-intimates.com

Prym Intimates Hong Kong Limited
Phone : 00852 2552 2112
Fax : 00852 2873 6194
email : CustomerService@prym-intimates.com.hk

Prym Newey Malaysia Sdn. Bhd.
Phone : 00606 3532190
Fax : 00606 3519006
email : sales@prym-intimates.com.my